



January 2021

# USER MANUAL

## LPT SERIES PUSH TRAVEL TROLLEY

(BS EN 13157)



**WARNING!**

This equipment should not be installed, operated or maintained by any person who has not read and understood all the contents of this manual. Failure to read and comply with the contents of this manual may result in serious bodily injury or death and/or damage to property.

# 1. GENERAL


This user manual provides important information for all personnel involved with the safe installation, operation and proper maintenance of this product.

When using any trolley there are different kinds of risks that you may encounter which could result in personal injury or damage to property. It is therefore imperative that anyone involved in the installation, maintenance or operation of the trolley is familiar with the contents of this user manual and follows the guidance set out in it.

# 2. SAFE OPERATION INSTRUCTIONS


1. The trolley should be inspected for wear or damage prior to assembly and installation.
2. NEVER use a trolley that is found to be defective in any way.
3. Only ever attach a hoist with a rated capacity equal to or less than the capacity of the trolley.
4. Only operate a trolley when the load is centred under it. Do not pull the trolley sideways.
5. Ensure that the load path is clear prior to moving the trolley. Never lift a load over people!
6. Avoid collision or bumping of the trolley.
7. Ensure that stops are securely installed at both ends of the beam prior to operation of the trolley.
8. Do not swing a suspended load.
9. Do not modify the trolley in any way.

# 3. TECHNICAL SPECIFICATION

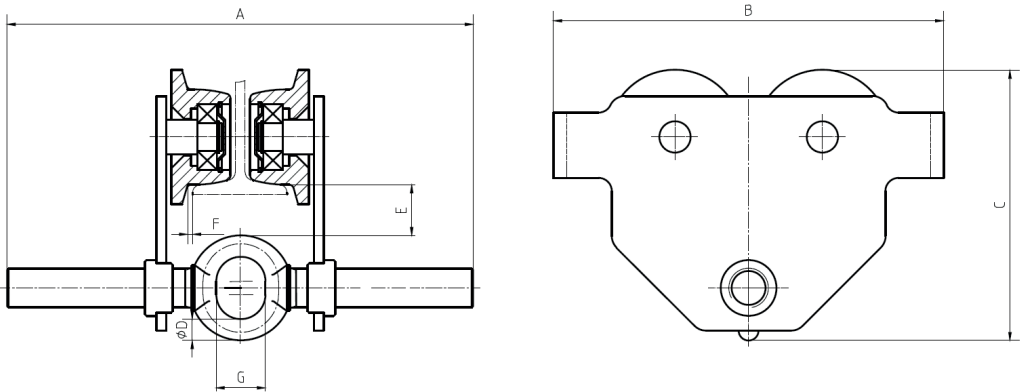

Model	LPT-0.5T	LPT-1T	LPT-2T	LPT-3T	LPT-5T	
Capacity (t)	0.5	1	2	3	5	
Proof load (t)	0.625	1.25	2.5	3.75	6.25	
Beam flange width (mm)	55-220	58-220	66-220	74-220	90-220	
Dimensions (mm)	A	285	300	300	328	354
	B	198	238	277	324	373
	C	158	183	208	249	296.5
	D	12.5	17	20	26	28
	E	40	31	31	31	40
	F	≈3	≈3	≈3	≈3	≈5
	G	25	29	36	46	52
Min. radius for curve (m)	0.5	0.7	0.9	1.2	1	
Weight (kg)	5	8.8	14	23	40	

## 4. EXPLODED VIEW DRAWING

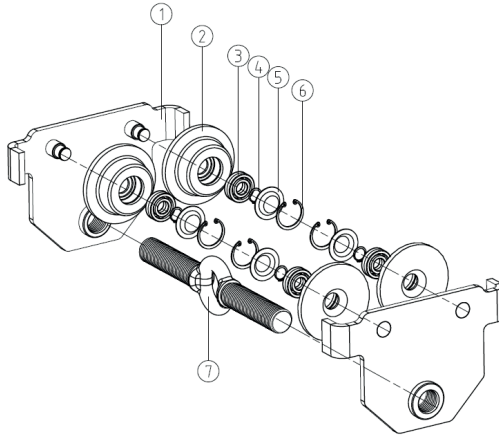

1	Two wheel side plate	5	Bearing ring
2	Wheel	6	Circlip
3	Bearing	7	Threaded load bar (axle)
4	Axle ring		

## 5. INSTALLATION


1. Measure the width of the beam flange.
2. Turn the threaded load bar to adjust the width of the trolley accordingly.
3. Ensure that a side clearance of between 3-5mm is maintained between the wheel flange and runway beam.

## 6. MAINTENANCE

1. Check the function of the trolley prior to use.
2. In the event that any defective parts are found, remove the trolley from service immediately.
3. Defective parts should be replaced with genuine items only.
4. See the table below for standard periodic maintenance:

Items	Method	Rejection Criteria	Remedy													
Plates	Check visually	Check the plates for wear and tear, cracks or deformation	Replace													
Axle	Measure	<table border="1"> <thead> <tr> <th rowspan="2">Capacity</th> <th>D (mm)</th> </tr> <tr> <th>Discard</th> </tr> </thead> <tbody> <tr> <td>0.5t</td> <td>≤ 11</td> </tr> <tr> <td>1t</td> <td>≤ 15</td> </tr> <tr> <td>2t</td> <td>≤ 18</td> </tr> <tr> <td>3t</td> <td>≤ 23</td> </tr> <tr> <td>5t</td> <td>≤ 25</td> </tr> </tbody> </table>	Capacity	D (mm)	Discard	0.5t	≤ 11	1t	≤ 15	2t	≤ 18	3t	≤ 23	5t	≤ 25	Replace
	Capacity	D (mm)														
		Discard														
0.5t	≤ 11															
1t	≤ 15															
2t	≤ 18															
3t	≤ 23															
5t	≤ 25															
	Check visually	Check the axle for wear and tear, cracks or deformation	Replace													

## 6. MAINTENANCE (continued...)

Items	Method	Rejection Criteria	Remedy														
Wheel	Measure 	<table border="1"> <thead> <tr> <th data-bbox="574 156 687 180">Capacity</th> <th data-bbox="687 156 803 180">C (mm)</th> </tr> </thead> <tbody> <tr> <td data-bbox="574 180 687 212"></td> <td data-bbox="687 180 803 212">Discard</td> </tr> <tr> <td data-bbox="574 212 687 244">0.5t</td> <td data-bbox="687 212 803 244">≤49.5</td> </tr> <tr> <td data-bbox="574 244 687 276">1t</td> <td data-bbox="687 244 803 276">≤63.5</td> </tr> <tr> <td data-bbox="574 276 687 308">2t</td> <td data-bbox="687 276 803 308">≤75</td> </tr> <tr> <td data-bbox="574 308 687 339">3t</td> <td data-bbox="687 308 803 339">≤94</td> </tr> <tr> <td data-bbox="574 339 687 371">5t</td> <td data-bbox="687 339 803 371">≤114</td> </tr> </tbody> </table>	Capacity	C (mm)		Discard	0.5t	≤49.5	1t	≤63.5	2t	≤75	3t	≤94	5t	≤114	Replace
	Capacity	C (mm)															
	Discard																
0.5t	≤49.5																
1t	≤63.5																
2t	≤75																
3t	≤94																
5t	≤114																
Check visually	Check the wheels for wear and tear, cracks or deformation. Check for smooth rotation.	Replace															