


8. DISCLAIMER

- Failure to adhere to the instructions supplied with the equipment may invalidate any claims with respect to damage, death or injury due to the misuse or malfunctioning of the apparatus.

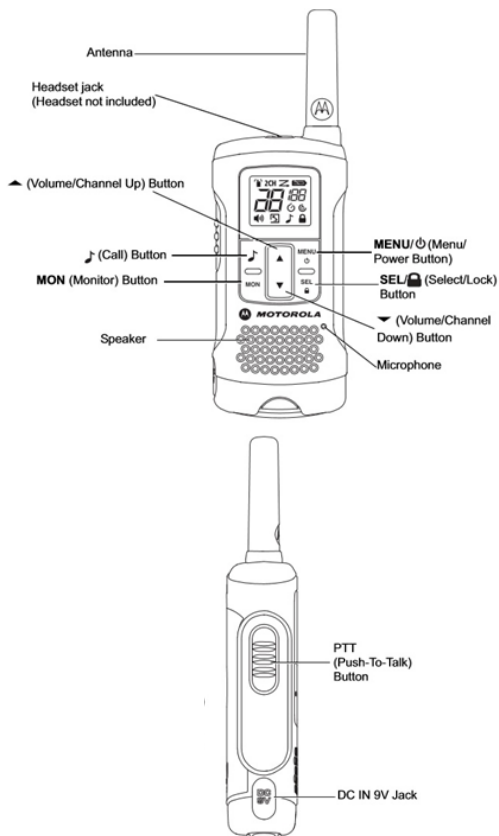

WARNINGS

- WARNING** – Do not try to modify or change the equipment in any way as this could void any warranty or cause damage to this equipment or persons using it.



HEAD OFFICE
GRANT HOUSE
LOCKETT ROAD
ASHTON IN
MAKERFIELD
WIGAN
WN4 8DE

ENGINEERING CENTRE
FOUNDATION HOUSE
WALLWORK ROAD
ASTLEY
MANCHESTER
M29 7JT

NORTH WEST - ASTLEY DEPOT
Wallwork Road
Astley
Manchester
M29 7JT
T: 01942 896282

NORTH EAST - DURHAM DEPOT
Thistle Road, Littleburn Ind.
Est., Langley Moor, County
Durham, DH7 8HJ
T: 01913 782100

YORKSHIRE - CASTLEFORD DEPOT
Allerton Bywater Business
Park, Newton Lane
Castleford, WF10 2AL
T: 01977 521930

EAST ANGLIA - STANTON DEPOT
Unit 5, O'Brien Ind.
Est., Grove Lane
Stanton, Bury St.
Edmunds, Suffolk
IP31 2BF
T: 01359 252204

MIDLANDS - RUGELEY DEPOT
Redbrook Lane
Brereton, Rugeley
Staffordshire
WS15 1QU
T: 01889 574777

SOUTH WEST - BRISTOL DEPOT
Severn Road
Chittening
Avonmouth
Bristol, BS11 0YL
T: 01179 820706

SOUTH WEST - EXETER DEPOT
Unit 58, Greendale Business
Park, Woodbury Salterton
Exeter, EX5 1EW
T: 01395 233194

SOUTH EAST - TRING DEPOT
Units 21 & 22, Airfield Ind.
Est., Cheddington Lane
Long Marston, Tring
Hertfordshire, HP23 4QR
T: 01296 663250

LONDON - DARTFORD DEPOT
Ray Lamb Way
Manor Road
Erith, Kent, DA8 2LB
T: 01322 344520



USER GUIDE: MOTOROLA TLKER 61 2-WAY RADIO



PLEASE READ & UNDERSTAND THIS USER GUIDE PRIOR TO COMPILING A SAFE SYSTEM OF WORK AND USING THE EQUIPMENT SUPPLIED

For the latest version of this document visit mgf.co.uk

mgf.co.uk

mgf.co.uk

enquiries@mgf.co.uk

0808 163 7672



1. IMPORTANT NOTES

- For the use of MGF supplied equipment only.
- Ensure users are fully trained in the operation of this equipment and a site specific safe system of works is in place and adhered to.
- It is essential that site specific risk assessments are undertaken.
- Do not try to modify or change the equipment in any way as this could void any warranty or cause damage to equipment or persons using it.
- If in doubt concerning the integrity of any part of the equipment DO NOT USE IT

2. MOTOROLA TLKER 61 2-WAY RADIOS

Specifications

| | |
|--------------------|-----------------------------|
| Indoor Range | 200m |
| Outdoor Range | 8km |
| Number of Handsets | 2 |
| Digital Display | 1.8" LCD Screen |
| Power | NI-MH Battery Pack |
| Talk Time | 16 Hours |
| Standby Time | 7 Days |
| Dimensions | 134 x 50 x 29mm [H x W x D] |
| Weight | 74g |
| Channels | 8 |

Features

- Low battery indicator
- Mute
- Silent setting
- Illuminated controls
- Night mode
- Hot keys
- Speakerphone

3. MGF EXAMINATION AND TESTING


- Upon return to MGF the equipment will be cleaned, inspected and function tested by a competent and trained MGF safety technician.

4. VISUAL INSPECTION/FUNCTIONAL TEST - PRIOR TO USE

- Before the start of each use ensure that the equipment is clean and free from debris and there are no obvious defects.
- Ensure that the item has a green tag, stating when it was last inspected.
- Each item comes with a unique ID number, please ensure this can be found.

5. CHARGING THE RADIOS

- Ensure the radio is turned OFF
- Place the charging cradle on a flat surface
- Place the radio in the cradle with the keyboard facing forward
- LED indicator will illuminate and remain illuminated as long as the radio is in the charger

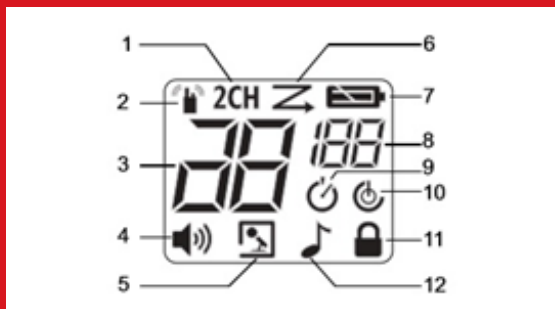

1. Dual Watch Indicator
2. Transmit/Receive Indicator
3. Channel Indicator
4. Volume Level Indicator
5. VOX/Room Monitor Indicator
6. Scan Indicator
7. Battery Level Meter
8. Sub-code Indicator
9. Up timer Indicator
10. APO (Auto Power Off) Indicator
11. Keypad Lock Indicator
12. Call Tone Indicator

6. BASIC FUNCTIONS

- Turning your Radio On/Off
 - Press and hold the MENU button to turn your radio ON/OFF.
- Adjusting the Volume
 - Adjust the volume by pressing the ▲ and ▼ buttons.
- Adjusting the Sound (Key Beeps)
 - Your radio emits a beep each time one of the buttons is pressed (except the PTT and J button).

- Press and hold the J button while turning the radio ON to switch the sound ON/OFF.

- Navigating through the Menu
 - Your radios have two Menu functions: Select Menu and Mode Menu.

- 1) To enter the Select Menu, press the SEL button.
- 2) To enter the Mode Menu, press the MENU button.
- 3) Additional presses of the SEL button or MENU button will advance you through the Menu.
- 4) To exit the Menu function, do one of the following:
 - a) Press and hold the MENU button, J
 - b) Press and hold the PTT, MON or the button
 - c) Wait 10 seconds until the unit automatically returns to "Normal" mode.

- Talking on Your Radio

- 1) Hold your radio 5-8 cm from your mouth.
- 2) Press and hold the PTT button while speaking.
- 3) Release the PTT button. You can now receive incoming calls. To respond, repeat procedure from step 1.

- 4) Note: When you continue to transmit for 60 seconds, the radio emits TX Time Out tone. The radio will stop transmitting.

- To speak to someone, both your radios must be set to the same channel and Sub-Code. Refer to "Selecting a Channel and a Sub-Code" below.

- Selecting a Channel and a Sub-Code

- To select a Channel:
 - 1) SEL button to enter Select Menu. Advance until the Channel indicator blinks.
 - 2) ▲ or ▼ to the required channel.
- To select a Sub-code:
 - 1) SEL button to enter Select Menu. Advance until the Sub-code indicator blinks.
 - 2) ▲ or ▼ to the required Sub-code.
 - 3) Exit the Select Menu.

7. STORAGE AND CARE

- These radios must be stored in a dry, clean area. When not in use the radios should be stored in the box provided by MGF.